


## **ULR-200**


3-383-9A

Listed Fire Pump & Controller NFPA-20 Compliant Packaged System

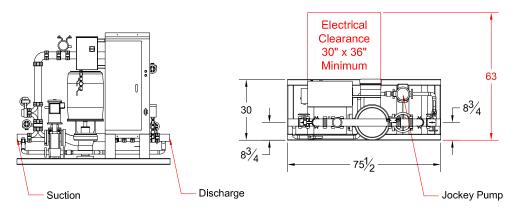









## 200GPM

Test Port, Flow Meter

**System Components** 


1	OS&Y Gate Valve	
2	Inline Pump & Motor	
3	Check Valve	
4	Case Relief Valve	
5	Monitored Butterfly	
6	3" Test Connection	
7	Flow Meter	
8	Air Release	

**Design Conditions** 


GPN	/I @_	PSI
HP	$\check{V}_{V}$	_Phase

Project:	
Contractor:	
Date:	P.O.:

## Jockey System Detail



## Sensing Line Detail



All dimensions inches - Not certified for construction purposes.

Controller:

Jockey Pump:\_\_\_\_\_

Jockey Controller: \_\_\_\_\_

Suction x Discharge: 3" GRV x 3" GRV





RESIDENTIAL & COMMERCIAL FIRE PUMP SPECIALISTS 6040 NE 112TH AVE. PORTLAND, OREGON 97220 PHONE: 800-878-8055 WWW.TALCOFIRE.COM